




# KV SALICE HINGE KIT PROGRAM

## POCKET DOOR HINGES

- Nickel & Black Finish
- 3-Way Adjustable

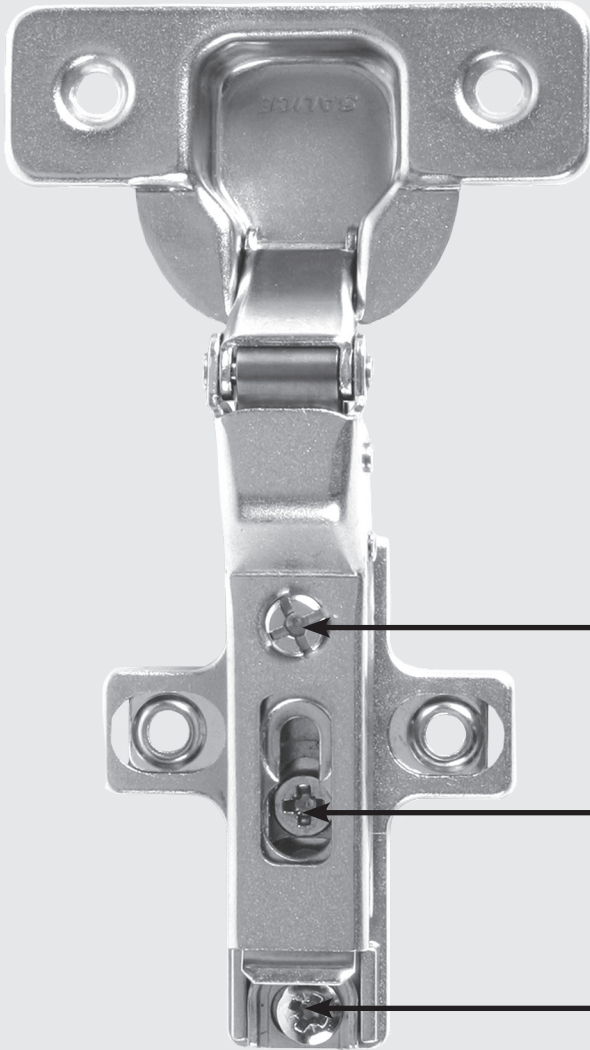

The Knappe & Vogt Salice Hinge Kit offers maximum flexibility with three adjustable cams—horizontal (lateral), depth, and vertical (height). These features allow precise fine-tuning for perfect door alignment, ensuring smooth, consistent operation.

Ideal for pocket doors in entertainment centers, computer workstations, and cabinetry, this hinge kit simplifies installation and adjustments while delivering a clean, professional finish. Its robust design ensures reliable performance, making it an excellent choice for both residential and commercial applications.

### Horizontal (Lateral) Adjustment Cam

The horizontal (lateral) adjustment range is 6mm (-1/5mm to +4.5mm for 35mm cup hinges, -0.5mm to +5.5mm for 40mm cups), while maintaining a constant gap behind the door.

### Vertical (Height) Adjustment Cam

The vertical (height) adjustment range is 4mm (-2mm to +2mm).

### Depth Adjustment Cam

The depth adjustment range is 3.1mm (-0.5mm to +2.8mm) for all hinge bases.

## PRODUCT FEATURES

- Three-way cam hinges provide fast and easy door adjustments. Horizontal, vertical and depth changes can be made without loosening any screws.
- Packaged for use with KV 8071, 8081 and 8091 Pocket Door Systems. Packaging includes hinge bases, hinges, mounting screws and cover caps.
- Four types of hinges are available to fit a wide variety of pocket door applications - standard inset, free swing, partial overlay and extra-thick doors.
- Backed by the exclusive Knappe & Vogt Limited Lifetime Warranty


# SALICE HINGE KIT TECHNICAL INFORMATION

## FRAMELESS APPLICATIONS - 8071 SETUP

### STANDARD OR FREE SWING INSET

Frameless, inset application with 3/4" thick door

- 8080 HKS SAL EB (Black)
- 8080 HKS SAL (NP)
- 8080 HKF SAL (NP)

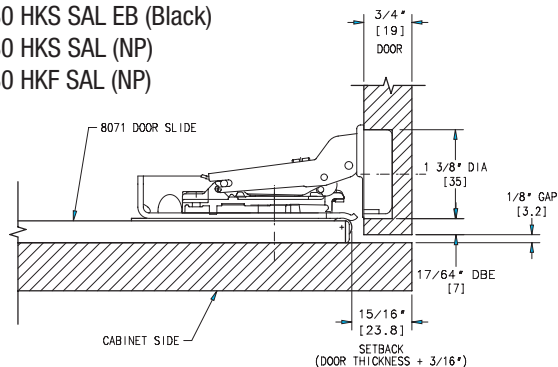


### PARTIAL OVERLAY

Frameless application with 3/4" thick door

Maximum overlay with full hinge adjustment is 3/8"



- 8080 HKL SAL EB (Black)
- 8080 HKL SAL (NP)

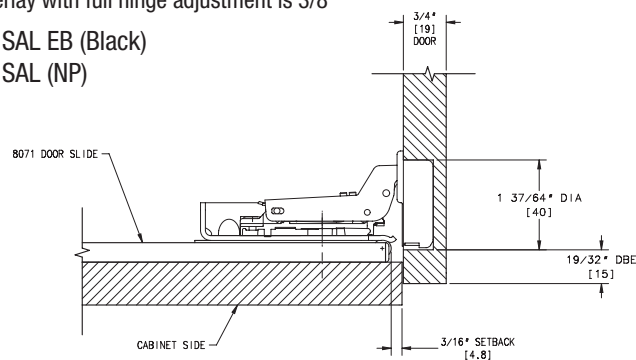

### THICK AND EXTRA-THICK INSET

Frameless, inset application with 1" to 1-1/4" thick door

- 8080 HKX SAL EB (Black)
- 8086 HKF SAL (NP)

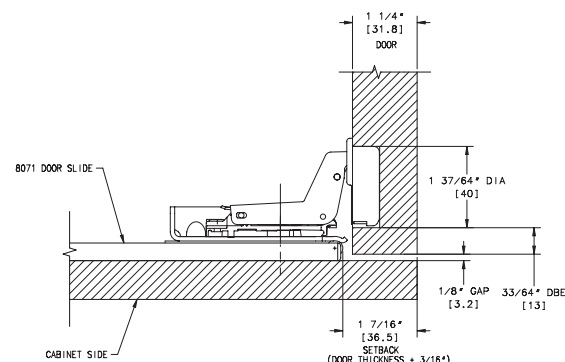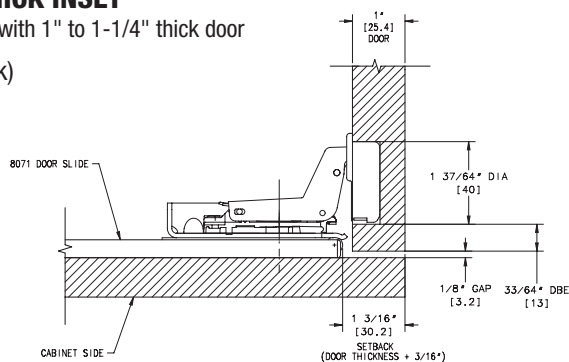


## FACE-FRAME APPLICATIONS - 8071 SETUP

### STANDARD INSET

Face-frame application with 3/4" thick door

- 8080 HKS SAL EB (Black)
- 8086 HKS SAL (NP)

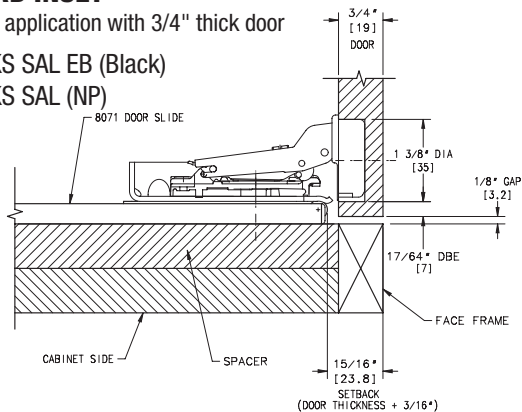


### PARTIAL OVERLAY

Face-frame application with 3/4" thick door

Maximum overlay with full hinge adjustment is 3/8"

- 8080 HKL SAL EB (Black)
- 8086 HKF SAL (NP)

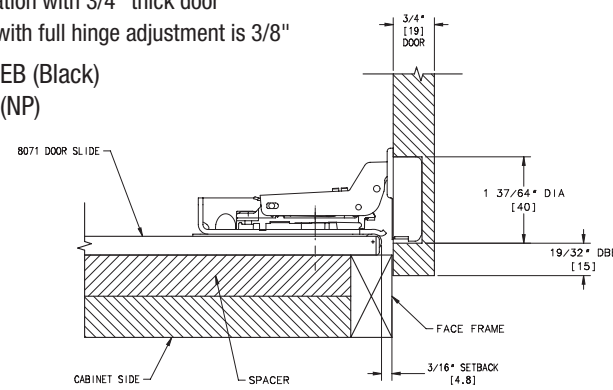

## HINGE SETUP CHART

Hinge Options	Hinge Description	Door Thickness	Edge Bore Distance (DBE)	Hinge Cup Bore Diameter	Maximum Slide Width (Including Hinge for Partition Installations)	Partial Overlay
8080 HKS SAL 8080 HKS SAL EB	Standard Hinge	3/4" [19mm]	17/64" [7mm]	1-3/8" [35mm]	1-21/32" [42.1mm]	N/A
8080 HKF SAL	Standard Hinge w/ Free Swing Knuckle	3/4" [19mm]	17/64" [7mm]	1-3/8" [35mm]	1-21/32" [42.1mm]	N/A
8080 HKL SAL 8080 HKL SAL EB	Partial Overlay Door	3/4" [19mm]	19/32" [15mm]	1-37/64" [40mm]	1-7/8" [47.6mm]	3/8" [9.5mm]
8086 HKX SAL 8086 HKX SAL EB	Extra-Thick Door	1" to 1-1/4" [25.4mm to 32mm]	33/64" [13mm]	1-37/64" [40mm]	2-5/16" [58.7mm]	N/A